



Jeep JT/JL Gateway Bypass Installation Instructions

**Owners of Jeep JK and Ford Bronco can
dispose of this module**




Bypass Module

Installation Instructions

Bypass Module




CAUTION: Do not turn on the engine, keep the ignition in the off position/setting.



- ① Locate the Gateway module, found behind or above the OBDII connector.


NOTE: The module is attached to the wall closer to the driver seat. A flashlight may be needed to see it.

- ② While gently pulling on the wire harness, release the clip on each connector and disconnect the harness from the module.



- ③ Insert the two gateway connectors into the bypass module as shown in the image to the right.

Once finished installing the Bypass Module, use zip-ties or another method to secure the harness and module away from any moving/mechanical components (i.e. pedals, latches, etc.)

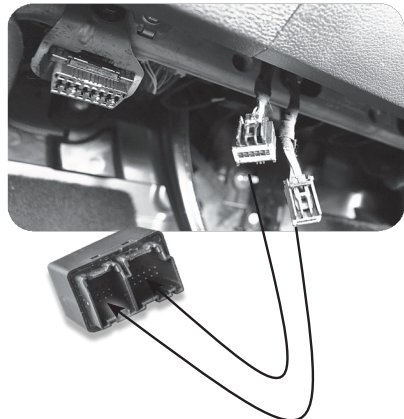

Remember to remove the bypass module prior to taking vehicle to dealership or repairshop.

Copyright© 2019

D10036100 Rev00 07/19/2026

For additional questions not found in the user guide call:
Superchips Technical Support: (801)-476-3343 6:00 am -
5:00 pm MST

To expedite your support call, please have your Vehicle
Information,
Part Number, and Serial Number ready prior to calling
Technical Support.